


# T2 Veiecelle

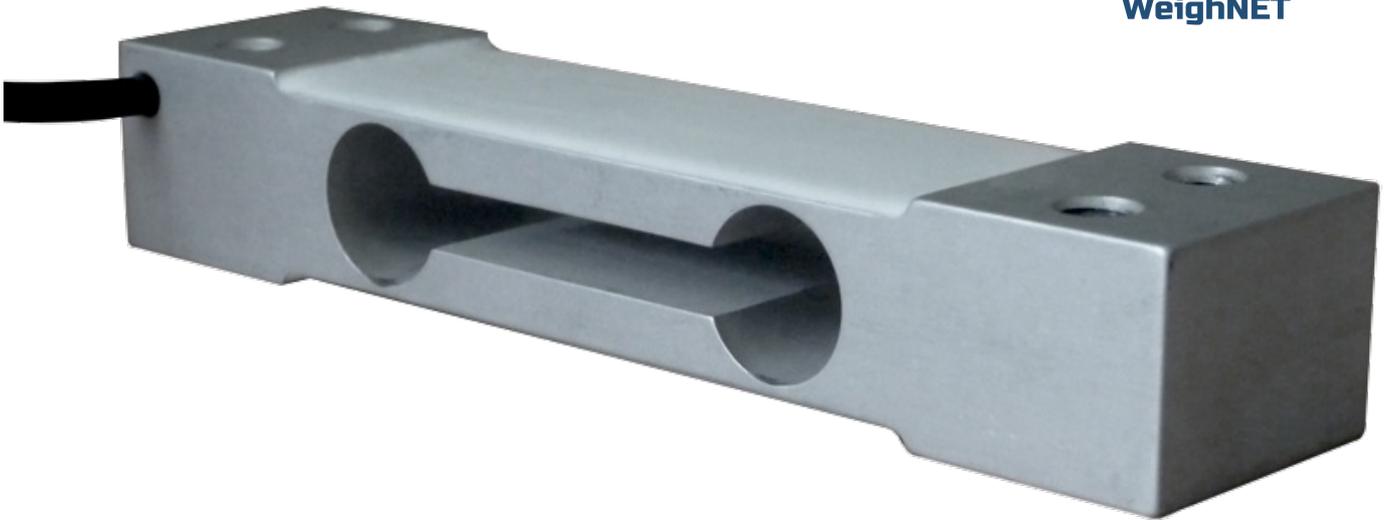

Den kostnadseffektive T2 Single Point Veie celle er produsert av høykvalitets aluminiumslegering, og dens design sørger for høy nøyaktige vektmålinger, selv med belastninger utenfor sentrum. Den er egnet for plattformer med størrelse 350 mm x 350 mm maksimalt (med lastcellen installert sentralt under plattformen). Pottet og silikonforseglet for å gi IP66-beskyttelse, den har en 4-leder skjermet PVC-kabel som standard.

## Nøkkelegenskaper:

- Kapasitetsområde: 5-50 kg
- Høykvalitets aluminiumslegering, korrosjonsbestandig
- 3000 divisjoner ytelse
- Fullt pottet og forseglet til IP66
- 350 x 350 mm maks. plattformstørrelse (med lastecelle plassert sentralt under plattformen)
- Skjermet PVC-kabel



## English Description

The cost-effective T2 single point load cell is manufactured from **high quality aluminium alloy** and its design provides for **high accuracy** weight measurement, even with **off-centre loads**. It is suitable for **platforms of size 350mm x 350mm** maximum (with the load cell installed centrally under the platform). Potted and silicone sealed to provide **IP66** protection, it features a **4-wire screened PVC cable** as standard.

## Key features

- Capacity range: 5-50kg
- High quality aluminium alloy, corrosion resistant
- **3000 divisions performance**
- Fully potted and sealed to **IP66**
- 350 x 350mm max. platform size (with load cell placed centrally under platform)
- Shielded PVC cable

Lager status / Stock Status: instock